



MAMBA

Bicycle parking system

FOR EVERY SITUATION A **UNIQUE** SOLUTION





Mamba

Bicycle parking system

The Mamba offers bicycle parking at a high-quality level in combination with design and practical application. The system has a striking tying device, which gives it a reliable appearance and is very suitable for public areas.

THIS IS THE KRAIT

- Vandal-resistant and durable
- Suitable for almost all types of bicycles
- No damage to the bicycle by using plastic sleeves
- Tear and abrasion resistant sleeves: TNO approved and UV resistant
- The front fork support in combination with the roll-back protection makes the bike very stable and sturdy without damage to the front wheel
- Minimum center-to-center distance between bicycle places 40 cm
- Integrated tying device

VERSIONS

- Single-sided
- Double-sided

CERTIFICATION

The Mamba is provided with the certificate FietsParKeur. This means the Mamba fulfils the requirements Foundation FietsParKeur demands to guarantee the quality of bicycle racks.

AVAILABLE COLOURS

The Mamba is standard in galvanized steel, but can be delivered in any RAL colour if required.

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00

E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The Mamba is model-based protected

SPECIFICATIONS

Model	Number of bicycle spots	Center-to-center distance	Width
Mamba 2 - single-sided	2	400 mm	800 mm
Mamba 4 - single-sided	4	400 mm	1600 mm
Mamba 4D - double-sided	4	400 mm	800 mm
Mamba 8D - double-sided	8	400 mm	1600 mm
Mamba Solitary High/Low	1	-	-

VARIANTS

Mamba Traverse

The Mamba Traverse is mounted above ground level. This creates space between the surface and the bicycle parking system.

Mamba with base plate

The spherical base plate functions to combat litter under the bicycle parking system

Mamba Solo

The Mamba Solo is available in a high and low model. Options for mounting are: 45° or 90°, on a concrete base, recessed in concrete and above ground level.



Mamba Leyden

The installation of the Mamba Leyden is located below ground level. This creates a quiet street scene.

MEASUREMENTS

Below is the drawing of a single-sided Mamba with a center-to-center distance of 40 cm. All variants of the Mamba can be extended to any possible number of bicycle places.

Product	Size (l x w)	Number of bicycle spots
Mamba single-sided	Without bicycle: 1600x728 With bicycle: 1600x1870	4

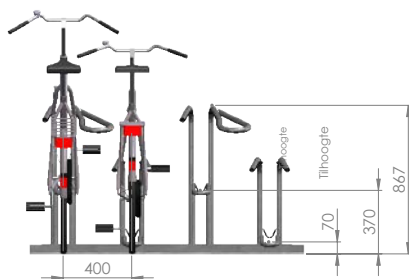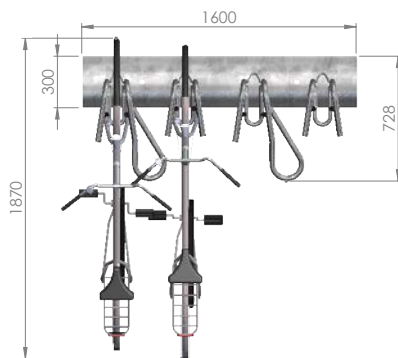

(Measurements in mm)


A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00

E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

MEASUREMENTS

Below is the drawing of a double-sided Mamba with a center-to-center distance of 40 cm.

Product	Size (l x w)	Number of bicycle spots
Mamba double-sided	Without bicycle: 800x1155 With bicycle: 800x2970	4

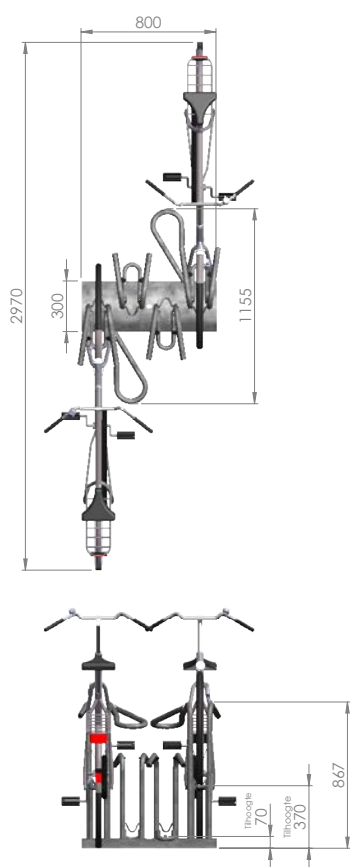

(Measurements in mm)

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00

E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com



