

CHARGING POINTS

For E-bikes

FOR EVERY SITUATION A *UNIQUE* SOLUTION





Charging points

For E-bikes

Due to the increasing number of E-bikes, the demand for charging points has grown. Klaver Fietsparkeren has various bicycle parking systems in its range for this purpose.

THESE ARE THE CHARGING POINTS

- Available for almost all bicycle parking systems
- All power cables concealed in the system
- Charging point can also be added later as a separate charging point
- One charging point offers the possibility to charge 2 bicycles

VERSIONS

- 2ParkUp with charging point
- Cobra with charging point
- Krait with charging point
- Mamba with charging point
- Freestanding charging point

TECHNICAL FEATURES

- Maximum of 18 bicycle places on a standard group of 16 Amp at 230 V

AVAILABLE COLOURS

The charging points are standard in galvanized steel, but can be delivered in any RAL colour if required.

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00


E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The charging points are model-based protected

2PARKUP WITH CHARGING POINTS

Below is the drawing of a single-sided 2ParkUp with charging points. This can be extended to any possible number of bicycle places.

Product	Size (l x w x h)	Number of bicycle spots
2ParkUp with charging points	3240x1900x2750	16

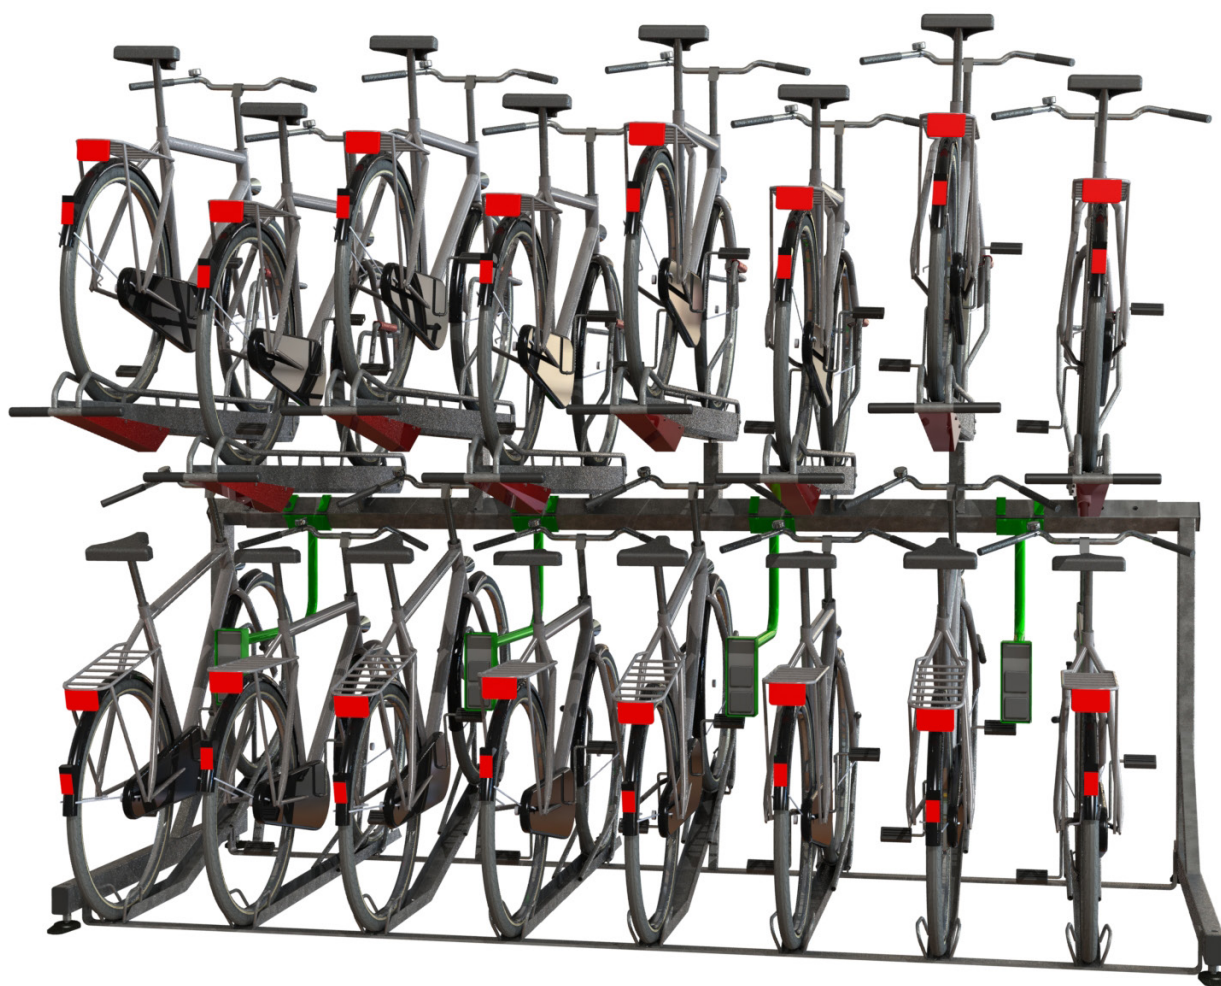

(Measurements in mm)

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00



E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The charging points are model-based protected

COBRA WITH CHARGING POINTS

Below is the drawing of a single-sided Cobra with charging points. This can be extended to any possible number of bicycle places.

Product	Size (l x w)	Number of bicycle spots
Cobra with charging points	Without bicycle: 1600x300 With bicycle: 1600x1870	4

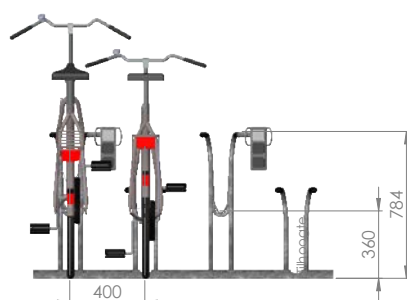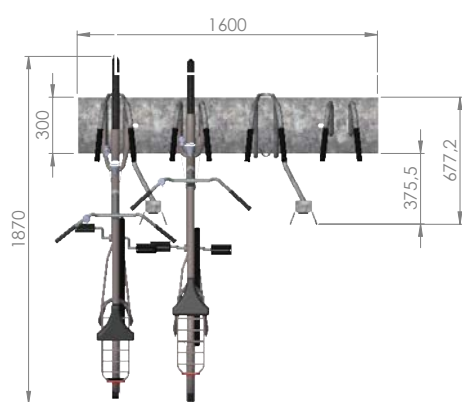

(Measurements in mm)

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00




E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The charging points are model-based protected

KRAIT WITH CHARGING POINTS

Below is the drawing of a single-sided Krait with charging points. This can be extended to any possible number of bicycle places.

Product	Size (l x w)	Number of bicycle spots
Krait with charging points	Without bicycle: 1600x606 With bicycle: 1600x1870	4

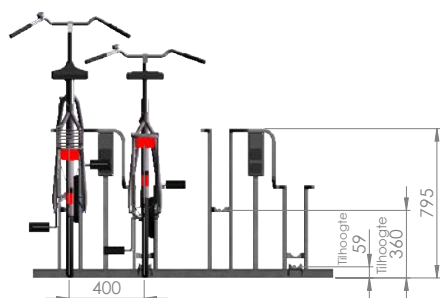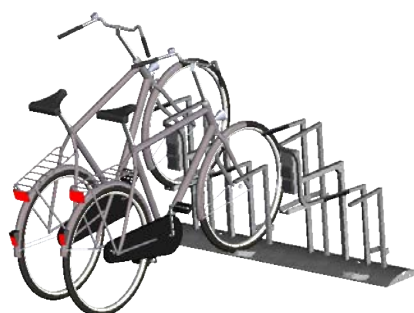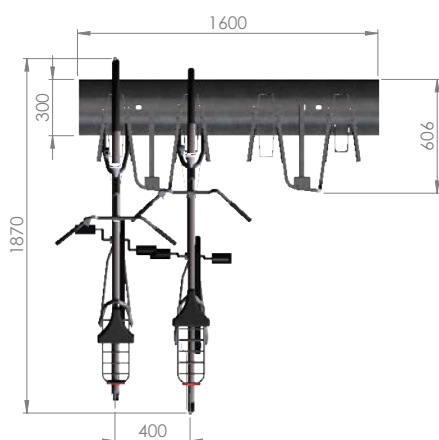

(Measurements in mm)

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00



E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The charging points are model-based protected

FREESTANDING CHARGING POINT

Below is the drawing of a freestanding charging point. This can later be added to an existing bicycle parking system.

Product	Size (w x d x h)
Freestanding charging point	150x113x608

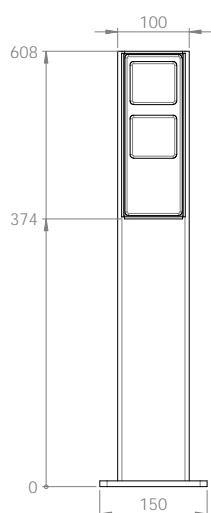

(Measurements in mm)

A Weberstraat 5 | 7903 BD Hoogeveen
T + 31(0) 528 74 52 00

E info@klaverfietsparkeren.nl
I www.klaverfietsparkeren.com

*Galvanized steel according to NEN-ISO 1461 | The charging points are model-based protected



**Cobra with
charging
points**

